

Technical Manual



AC25/-WH SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 16 Ohms
- System Input Power Rating: 225W Continuous Pink Noise, 450W Program, 900W Peak
- Frequency Response: 90 Hz - 18 kHz (± 3 dB)
- Frequency Range: 80 Hz - 20 kHz (-10 dB)
- Crossover Frequency: 3.3 kHz

SYSTEM COMPONENTS:

- Cabinet: Enclosure (Not for Sale)
- Grille: 365031-001, 365031-101(WH)
- Low Frequency Transducer: 2 225H, 135 mm (5.25 in) Cone Transducer
- DC Resistance: 5 ohms
- High Frequency Transducer: 201J, 25 mm (1 in.) Dome Tweeter

SYSTEM COMPONENTS: (CONT'D)

- DC Resistance: 9.8 ohms
- Crossover Network: 365058-001

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 10.0V Input, 20 Hz to 20 kHz
- B. L.F. Aural Sweep Test: 5.0V Input, 20 Hz to 2 kHz
- C. H.F. Aural Sweep Test: 0.75V Input, 500 Hz to 20 kHz

PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 377.8 x 150.3 x 177.8 mm D (14.9 x 5.9 x 7.0 in.D.)
- Shipping Weight: 16.5 lb (7.5 kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.


PACKAGE

Warranty 59660
Specification Sheet
365226-001


Carton
365067-001

Filler, Pair (1)
365064-001

PKG, Microfoam (2)
49790P
20" x 18" sheets

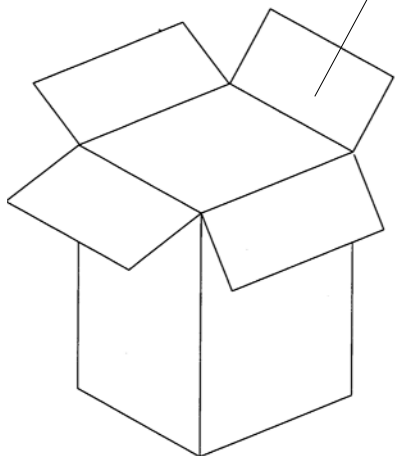

WIRING DIAGRAM

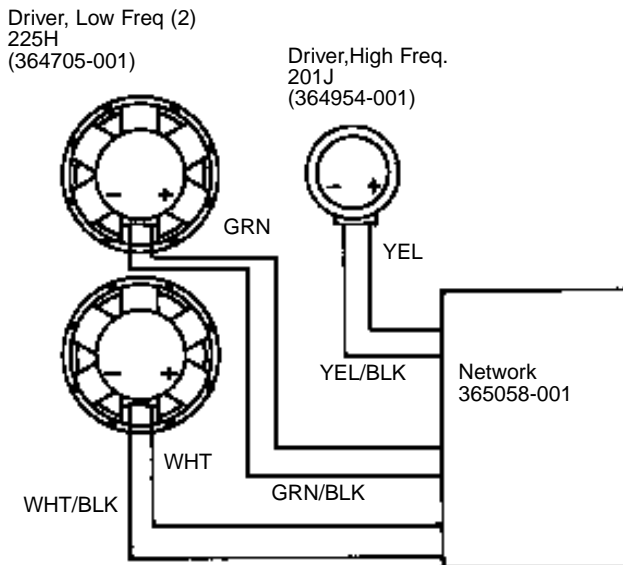


SEE NETWORK SCHEMATIC PAGE

NOTE: INDIVIDUAL PARTS FOR THE ABOVE CROSSOVER ARE NOT AVAILABLE. A COMPLETE REPLACEMENT ASSEMBLY SHOULD BE ORDERED.

JBL AC25/-WH

SCHEMATIC (365058-001)

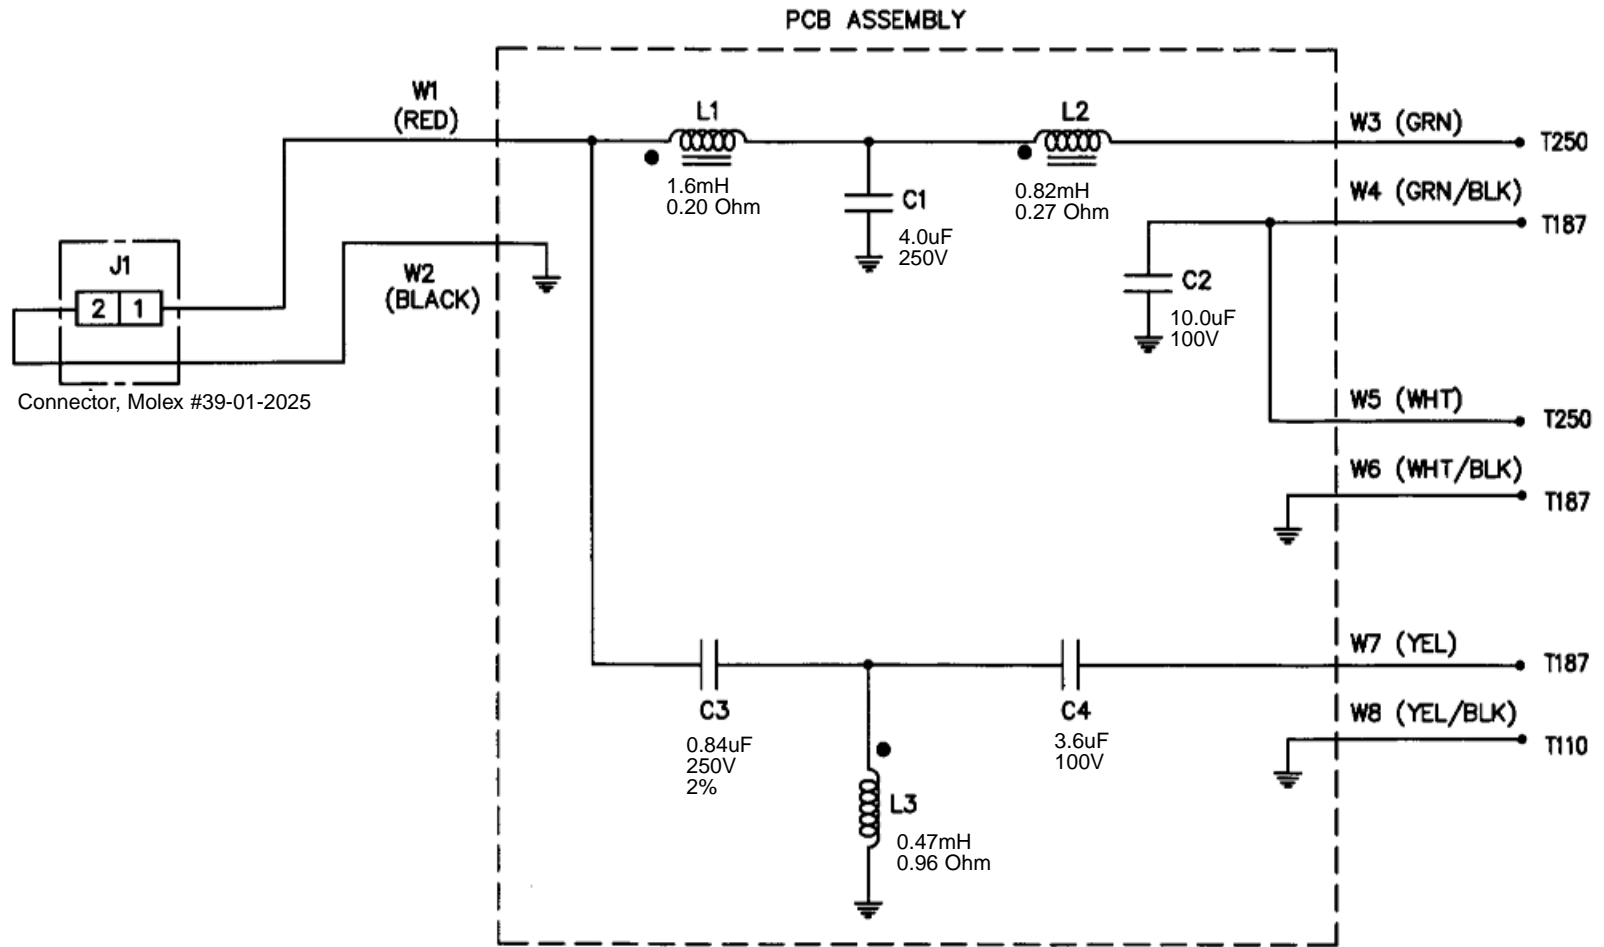


Individual Parts for the above crossover are not available.
A complete replacement assembly should be ordered.

JBL AC25/-WH

JBL AC25/-WH

COMPONENT EXPLODED VIEW

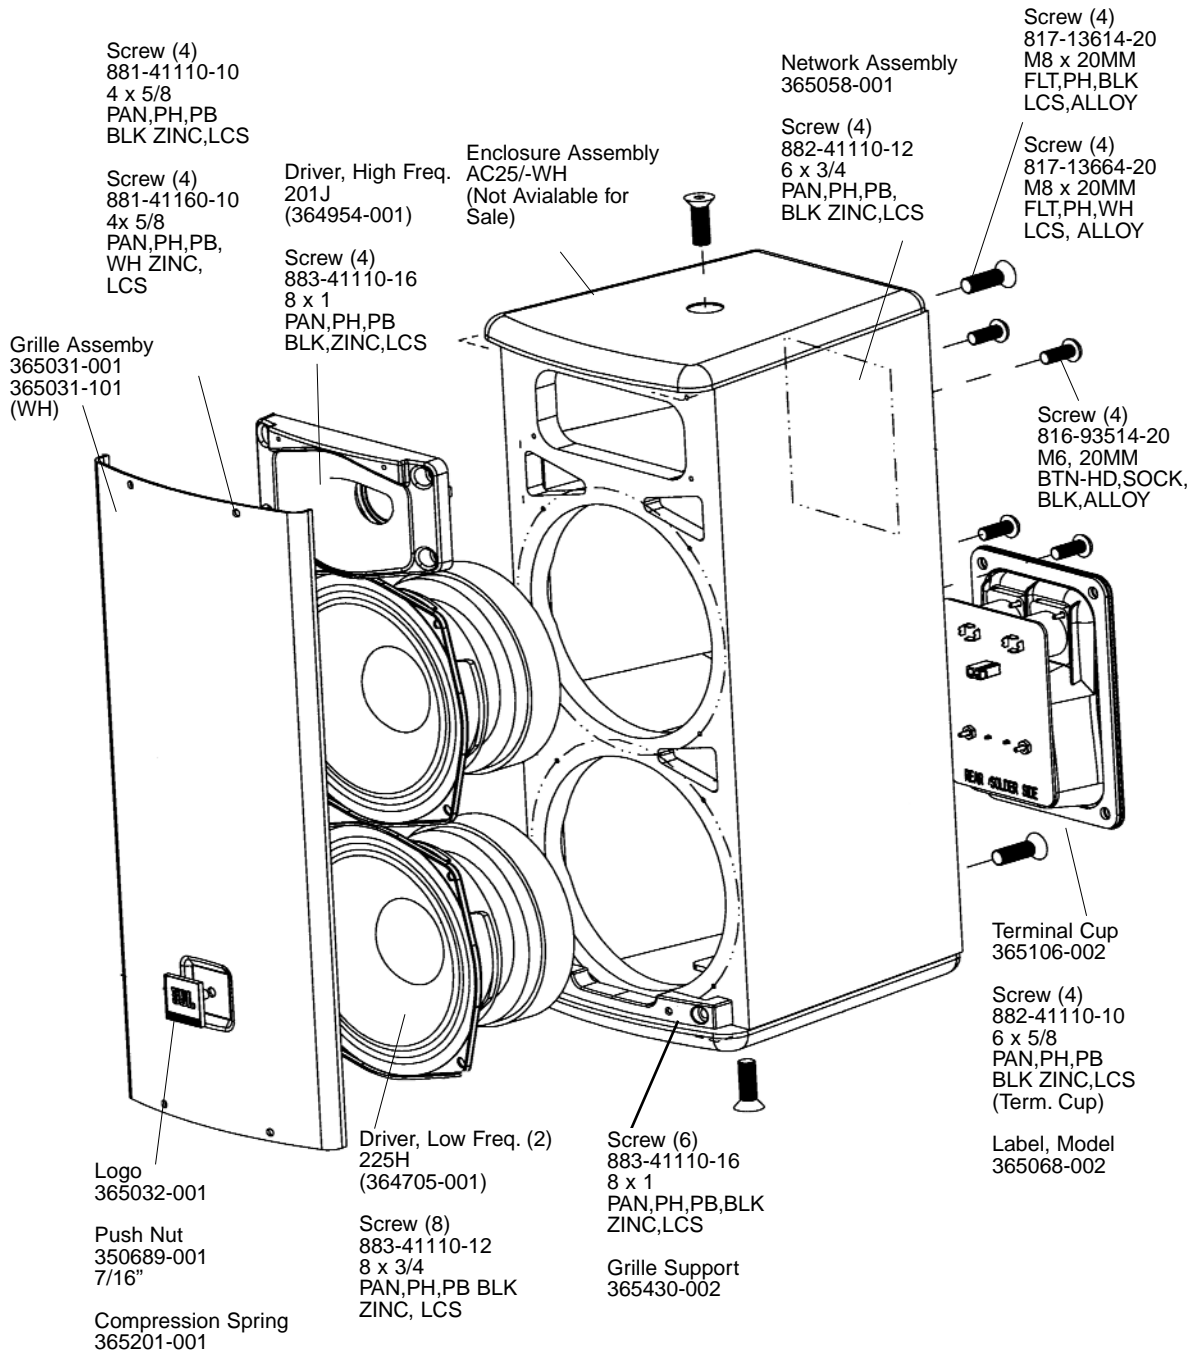

JBL AC25/-WH